

F

E

D

C

B

A

F

E


D

C

B

A

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

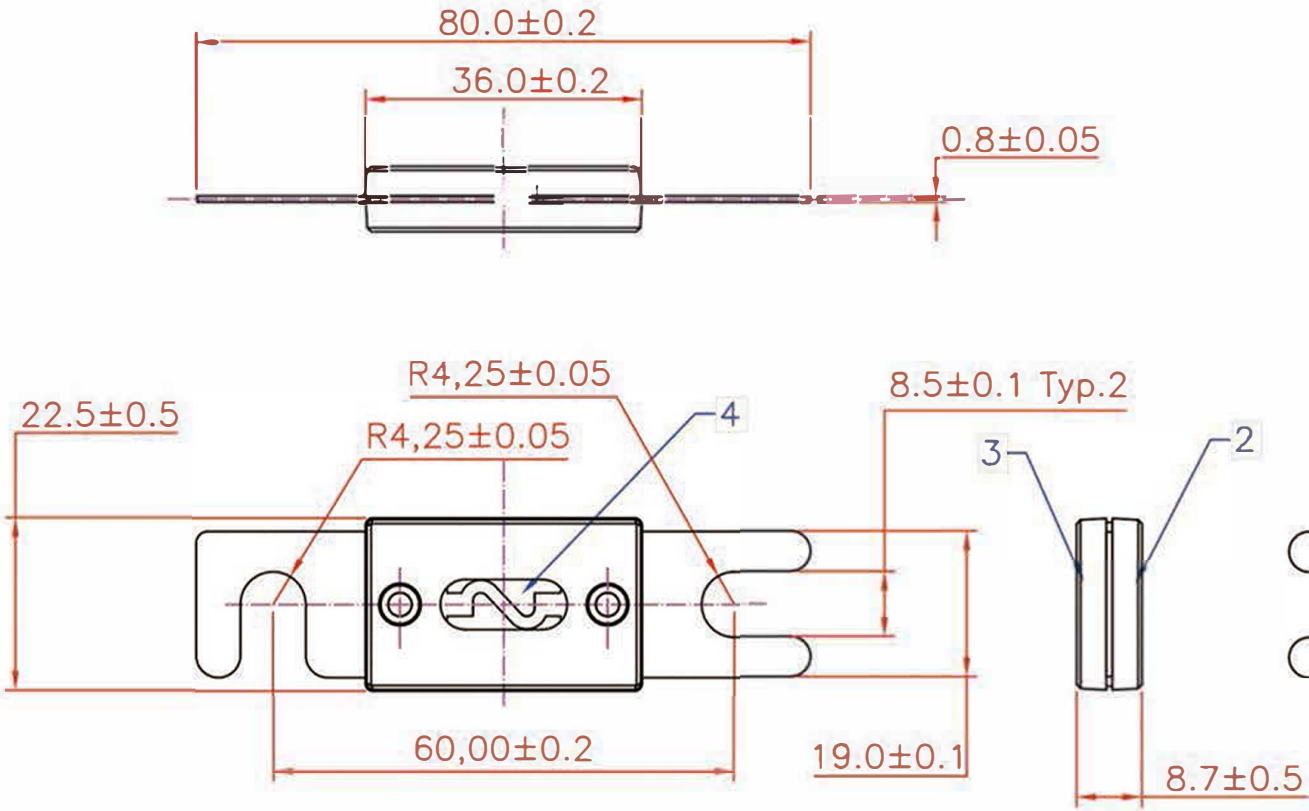

5	CC-8123-N	transparent cover	1	IS-3PC	transparent
4	CC-8122-N	Connector	2	Brass copper	Natural
3	PB-8121-N	PLASTIC COVER	1	bakelite	Black
2	PB-8122-N	PLASTIC BASE	1	bakelite	Black
1	TC-8122-N	TERMINAL CONTACT	1	Alloy	Au/Ni Plates
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

Dongguan Aolittel Electronic Co.,Ltd

UNLESS OTHERWISE STATED		Fasten Fuse				CUSTOMER	
WALL THICKNESS		MM		FOR ANL			
LINEAR	.XX	±0.15	MM	DSGN	Tommy Qiu	07-12-08	SCALE free
	.XXX	±0.05	MM	DFTS	Tommy Qiu	07-12-08	SHEET 1 OF 2
ANGULAR	0.5	°	MAX	CHKD			PART NO.
DRAFT ANGLE/SIDE	0.5	°	MAX	APPD			REV A
BURR & FLASH	0.10	MAX					SEE THE LIST
BREAK CORNERS	0.20	R.MAX					
PARTING LINE MISMATCH	0.05	MAX					

12345678

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

1. the fuses shown are for in motor vehicles, boats and trailers to protect electrical wiring and vehicles.This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements.
2. A fuse is a device designed to interrupt the electrical circuiut when subjected to overcents. This action is to be nonreversible and the fuse is intended to be replaced after the circuit, malfunction has been corrected. capable of meeting the vehicle requirements.

3. Functional Characteristics

TESTING CURRENT	BLOW TIME LIMIT
150% (Rating <225A)	1Hr. minimum
160% (Rating >225A)	6seconds minimum
220%	60seconds Max
250%	0.8sec-10sec
400%	0.2sec-2sec

4. Standard: DIN43560/1;

5. Interrupting Rating: 1000A@72VDC;
Interrupting Rating: 1500A@48VDC;
Interrupting Rating: 2000A@32VDC;

17	32V/48V/72V	400A	ANL-B-400
16	32V/48V/72V	350A	ANL-B-350
15	32V/48V/72V	300A	ANL-B-300
14	32V/48V/72V	250A	ANL-B-250
13	32V/48V/72V	200A	ANL-B-200
12	32V/48V/72V	175A	ANL-B-175
11	32V/48V/72V	150A	ANL-B-150
10	32V/48V/72V	125A	ANL-B-125
9	32V/48V/72V	100A	ANL-B-100
8	32V/48V/72V	80A	ANL-B-80
7	32V/48V/72V	70A	ANL-B-70
6	32V/48V/72V	60A	ANL-B-60
5	32V/48V/72V	50A	ANL-B-50
4	32V/48V/72V	40A	ANL-B-40
3	32V/48V/72V	35A	ANL-B-35
2	32V/48V/72V	30A	ANL-B-30
1	32V/48V/72V	20A	ANL-B-20
ITEM	Voltage rating	RATING	ASSEMBLY P/N

Dongguan Aolittel Electronic Co.,Ltd

UNLESS OTHERWISE STATED		Fasten Fuse			CUSTOMER	
WALL THICKNESS		FOR ANL				
LINEAR	.XX	±0.15	MM	DSGN	Tommy Qiu	07-12-08
	.XXX	±0.05	MM	DFTS	Tommy Qiu	07-12-08
ANGULAR		±0.5	DEG	CHKD		
DRAFT ANGLE/SIDE		0.5	*MAX	APPD		
BURR & FLASH		0.10	MAX	PART NO.		REV
BREAK CORNERS		0.20	R.MAX	SEE THE LIST		A
PARTING LINE MISMATCH		0.05	MAX			

12345678